

## Super Slim LED High Bay Light

Model : GK03124



Suzhou Jolighting Co.Ltd



# Specification

Model	NS-GK03124-80	NS-GK03124-100	NS-GK03124-150	NS-GK03124-200	NS-GK03124-240
Input Voltage	110-277Vac	110-277Vac	110-277Vac	110-277Vac	110-277Vac
Power	80W	100W	150W	200W	240W
Power Factor	>0.96	>0.96	>0.96	>0.96	>0.96
Led Chip	2835/3030	2835/3030	2835/3030	2835/3030	2835/3030
Luminous Efficiency	150/180LM/W	150/180LM/W	150/180LM/W	150/180LM/W	150/180LM/W
Luminous flux	12000/14400LM	15000/18000LM	22500/27000LM	30000/36000LM	36000/43200LM
Color Temp.	Customized	Customized	Customized	Customized	Customized
Beam Angle	110°	110°	110°	110°	110°
LM80	>36,000hrs	>36,000hrs	>36,000hrs	>36,000hrs	>36,000hrs
CRI	70+	70+	70+	70+	70+
Working Temp	-30-40°C	-30-40°C	-30-40°C	-30-40°C	-30-40°C
IP Rating	IP66	IP66	IP66	IP66	IP66
Driver Efficiency	96%	96%	96%	96%	96%
Surge Protection	4KV/4KV	4KV/4KV	4KV/4KV	4KV/4KV	4KV/4KV
Life Span	60000hrs	60000hrs	60000hrs	60000hrs	60000hrs
Warranty	5 Years	5 Years	5 Years	5 Years	5 Years
IK Rating	IK08	IK08	IK08	IK08	IK08



# Features


With driver built-in design, it is much more slimmer.



Compared with the original driver installation on the heat sink, the driver install on the side of the heat sink is much better.

- 1. Compared with the traditional led high bay light which the driver installed above, the height is reduced, container loading and transporation and storage can be saved about 3/5 volume.
- 2. 60% sea freight can be saved for a container.
- 3. 60% storage fee can be saved for a container.
- 4. 60% inland transportation cost can be saved for a container.

Model	D	Height H1	Height H2	Weight
NS-GK03124-80	φ240mm/9.4in	53mm/2.1n	96mm/3.8in	1.8kg
NS-GK03124-100	φ240mm/9.4in	53mm/2.1in	96mm/3.8in	1.8kg
NS-GK03124-150	φ240mm/9.4in	53mm/2.1n	96mm/3.8in	1.8kg
NS-GK03124-200	φ280mm/11.0in	57mm/2.3in	101mm/4.0in	2.2kg

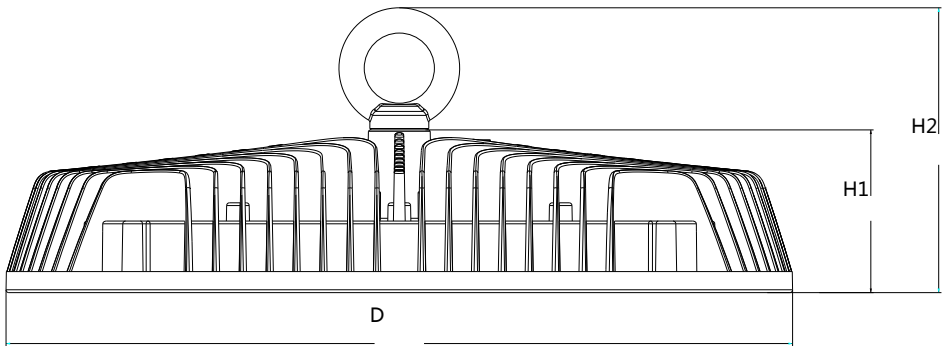





# Features

- 1.Black/white optional
- 2.Adopt high quality magnesium alloy,heat dissipation is faster
- 3.Adopt air fluid design, the heat dissipation is better.

High Quality  
Magnesium Alloy  
Faster Heat Dissipation

Adopt high quality magnesium alloy, heat dissipation is faster.  
Comply with heat dissipation of air fluid, better heat dissipation effect with greater heat dissipation area.







# Comprehensive Details



We are committed to providing an integrated design to maximize product reliability so that it can work in extreme environments.

- Beam Angle 110°

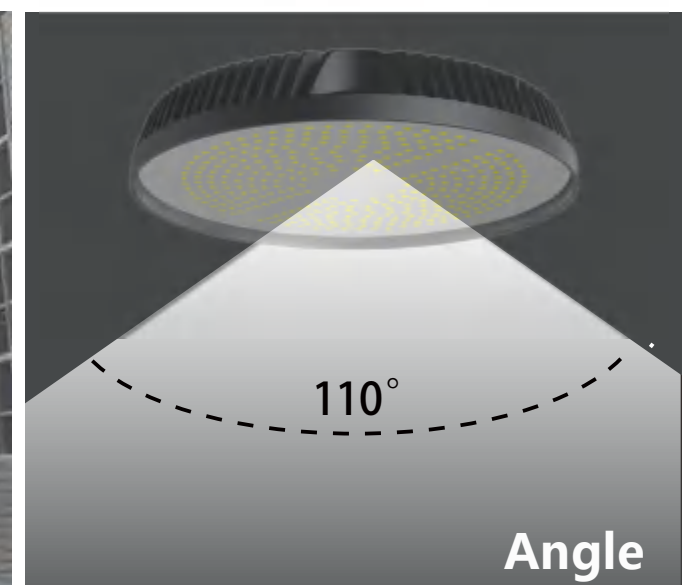

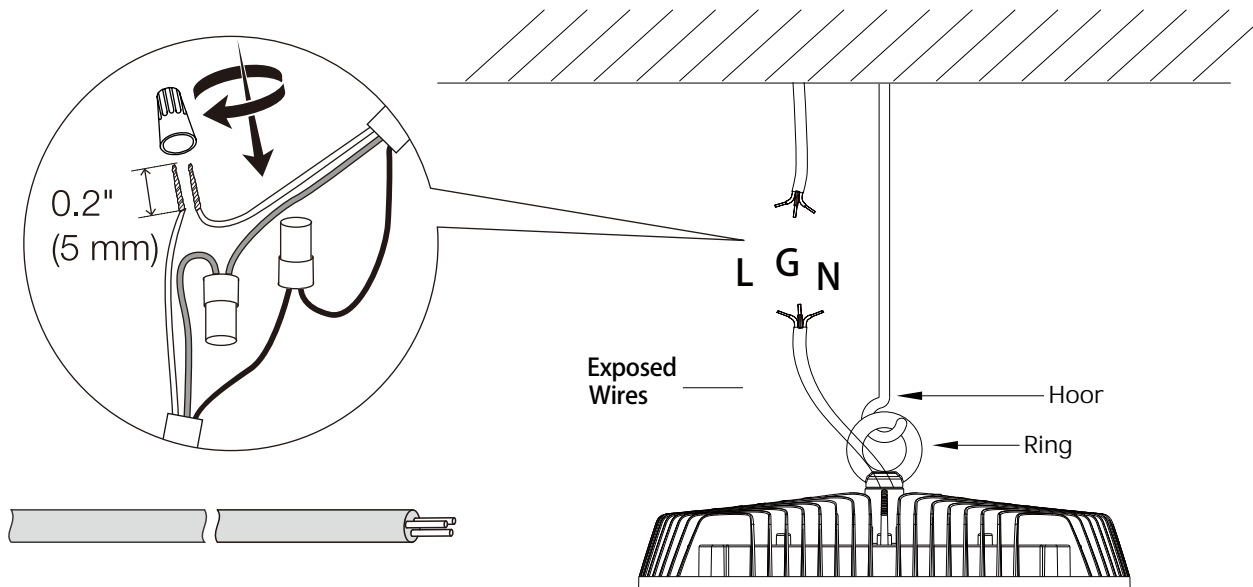

Wire method:

## Easy Installation


Easy installation and operation.  
Multiple installation methods, suitable for various occasions.  
Don't turn on the power before installation is completed.




# Package

Each fixture is individually Packed

Model	NS-GK03124-80	NS-GK03124-100	NS-GK03124-150	NS-GK03124-200
Packing size	265*265*315mm	265*265*315mm	265*265*315mm	305*305*335 mm
Weight	10KG /5PCS	10KG /5PCS	10KG /5PCS	12 KG/5PCS
Loading quantity	20GP 6305PCS 40HC 14560PCS	20GP 6305PCS 40HC 14560PCS	20GP 6305PCS 40HC 14560PCS	20GP 3755PCS 40HC 10700PCS

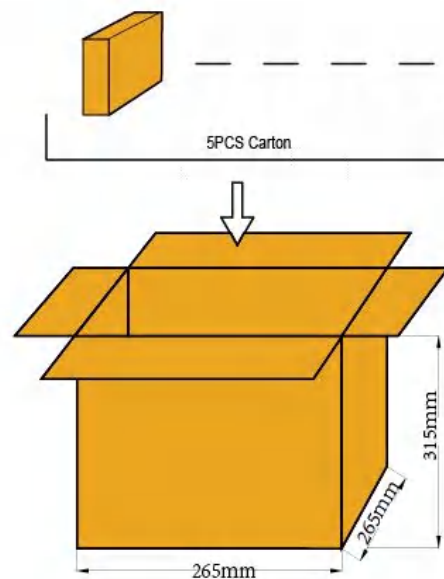

NS-GK03124-80/100/150

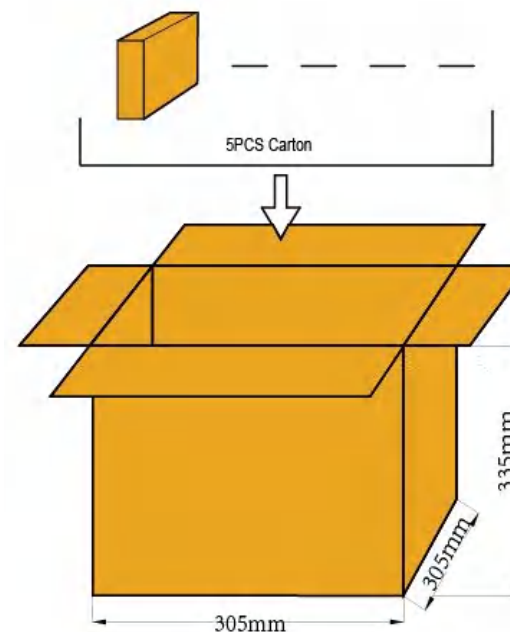

NS-GK03124-200